



PRO-LINE[®]

Precharged Water System Tanks



125 PSI Working Pressure

- Deep drawn steel is double the strength of head-and-shell designs.

Stainless Steel System Connection

- High grade 304L material for longer life in aggressive water conditions.

Fresh Water Turbulator[®]

- Patented technology agitates incoming water to reduce stagnation.

Heavy-Duty Diaphragm

- Pro-grade material for durability.

Polypropylene Liner

- Nonmetallic barrier meets NSF[®] International Standard 61; no sprayed-on coatings.

Projection-Welded Air Stem

- Eliminates potential leak paths to maintain precharge. No gaskets or threaded fittings.

Welded Steel Base

- Won't rotate out of position or wobble like some plastic stands or clamp-on metal designs.

Lead Free Construction

- No brass parts or lead-bearing components.


5-Year Warranty

Reliable, Durable and Affordable.



PRO-LINE[®]

Pro-Line precharged well tanks deliver reliable performance at an affordable price. All feature 125 PSI working pressure, Stainless Steel connection, Fresh Water Turbulator[®] and a 5-year limited warranty. Made at our ISO 9001:2015 certified facilities, Pro-Line well tanks are an outstanding value.

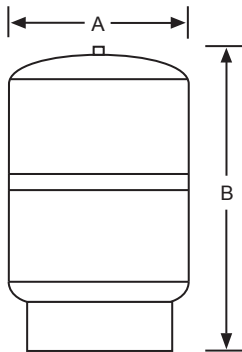

| Specifications | | | | | | | | | |
|----------------|-----------------------|-------------------------------|---------------------|-------------------|---------------------------------|---------------------------|-----------|-----------|------------------------|
| Model Number | Tank Volume (Gallons) | Max. Accept. Volume (Gallons) | A Diameter (Inches) | B Height (Inches) | System Connection NPTF (Inches) | System Drawdown (Gallons) | | | Shipping Weight (lbs.) |
| | | | | | | 30/50 PSI | 40/60 PSI | 50/70 PSI | |
| PL-14 | 14 | 11.3 | 15 | 25 | 1 | 4.3 | 3.8 | 3.3 | 22 |
| PL-20 | 20 | 11.4 | 15 | 32 | 1 | 6.2 | 5.4 | 4.7 | 30 |
| PL-26 | 26 | 11.4 | 15 | 39 | 1 | 8.0 | 7.0 | 6.1 | 37 |
| PL-32 | 32 | 11.2 | 15 | 47 | 1 | 9.9 | 8.6 | 7.6 | 43 |
| PL-34 | 34 | 34.0 | 22 | 30 | 1¼ | 10.5 | 9.1 | 8.0 | 50 |
| PL-44 | 44 | 33.9 | 22 | 36 | 1¼ | 13.6 | 11.8 | 10.4 | 57 |
| PL-62 | 62 | 34.1 | 22 | 47 | 1¼ | 19.2 | 16.6 | 14.6 | 75 |
| PL-81 | 81 | 33.2 | 22 | 57 | 1¼ | 25.0 | 21.7 | 19.1 | 92 |
| PL-86 | 86 | 46.4 | 26 | 47 | 1¼ | 26.6 | 23.0 | 20.3 | 99 |
| PL-119 | 119 | 46.4 | 26 | 62 | 1¼ | 36.8 | 31.9 | 28.1 | 133 |

Stainless Steel System Connection with Fresh Water Turbulator[®]
 Maximum Operating Temperatures: 200°F. Factory Pre-Charge: 38 PSI. Maximum Working Pressure: 125 PSI.



| Sizing | | | | | | |
|-----------------------------------|--|-----------|-----------|---------------------------------------|------------|------------|
| Pump Discharge Rate GPM (Approx.) | Pumps Up To 3/4 hp & 1 Minute Run Time | | | Pumps Over 3/4 hp & 2 Minute Run Time | | |
| | 30/50 PSI | 40/60 PSI | 50/70 PSI | 30/50 PSI | 40/60 PSI | 50/70 PSI |
| 5 | PL-20 | PL-20 | PL-26 | PL-34 | PL-44 | PL-44 |
| 7 | PL-26 | PL-32 | PL-32 | PL-62 | PL-62 | PL-62 |
| 10 | PL-32 | PL-44 | PL-44 | PL-81 | PL-81 | PL-86 |
| 12 | PL-44 | PL-62 | PL-62 | PL-81 | PL-119 | PL-119 |
| 15 | PL-62 | PL-62 | PL-81 | PL-119 | PL-119 | PL-81 (2) |
| 20 | PL-81 | PL-81 | PL-86 | PL-81 (2) | PL-81 (2) | PL-86 (2) |
| 25 | PL-81 | PL-119 | PL-119 | PL-81 (2) | PL-119 (2) | PL-119 (2) |
| 30 | PL-119 | PL-119 | PL-81 (2) | PL-119 | PL-119 (2) | PL-86 (3) |
| 35 | PL-119 | PL-81 (2) | PL-81 (2) | PL-119 (2) | PL-119 (3) | PL-119 (3) |
| 40 | PL-81 (2) | PL-81 (2) | PL-86 (2) | PL-119 (3) | PL-119 (3) | PL-119 (3) |

Larger Tank = Fewer Cycles for Longer Tank and Pump Life



1400 Division Road, West Warwick, RI USA 02893
 T: 800.426.8765 www.amtrol.com

